

LMB-390 SERIES




Features

- Auto white balance
- True Day and Night function
- BLC, AGC, AES, ON/OFF switchable
- Collocate DC auto-diaphragm lens
- Infrared acceptable
- Accept DC type auto iris lens



Dimensions

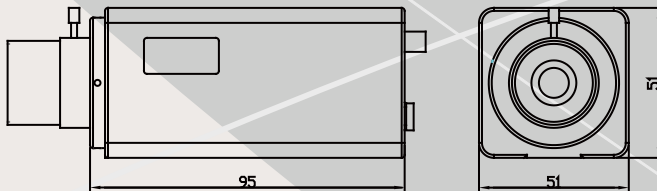

ITEMS	LMB-390 SERIES
SCANNING SYSTEM	2:1 Interlace
ELECTRONIC SHUTTER	ON/OFF switchable
GAIN CONTROL	ON/OFF switchable
BACK LIGHT COMPENSATION	ON/OFF switchable
WHITE BALANCE	Auto
AUTO IRIS	DC Drive
S/N RATIO	More Than 48 dB
GAMMA	0.45
VIDEO OUTPUT	1 VP-P, 75 ohms
STORAGE/OPERATING TEMPERATURE	-30°C ~ +60°C / -10°C ~ +45°C
DIMENSIONS (L*W*H) mm	95*51*51
WEIGHT	280g

Model NO.	Image Sensor	Picture Elements H*V	TVL	Lens Type	Power Consumption	Sensitivity F:1.2	Chip
LMB-390ARE	1/3" SHARP CCD	NTSC:512(H)×492(V) PAL:500(H)×582(V)	420	CS Mount	DC12V/90mA	0.5 LUX	NEXT CHIP
LMB-390ASE	1/3" SONY CCD	NTSC:512(H)×492(V) PAL:500(H)×582(V)	420	CS Mount	DC12V/90mA	0.1 LUX	NEXT CHIP
LMB-390ASH	1/3" SONY Super HAD CCD	NTSC:768(H)×494(V) PAL:752(H)×582(V)	480	CS Mount	DC12V/100mA	1 LUX	NEXT CHIP
LMB-390ASR	1/3" SONY CCD	NTSC:512(H)×492(V) PAL:500(H)×582(V)	420	CS Mount	DC12V/90mA	0.1 LUX	SONY 11R
LMB-390HQ	1/3" SONY Super HAD CCD	NTSC:768(H)×494(V) PAL:752(H)×582(V)	540	CS Mount	DC12V/120mA AC90V~260V/3W	0.2 LUX	SONY HQ1