

LMD-200 SERIES





Features

- Digital signal processor
- Auto trace white balance
- Automatic gain control
- Auto backlight compensation



Dimensions

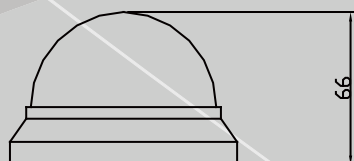

ITEMS	LMD-200 SERIES
SCANNING SYSTEM	2:1 Interlace
ELECTRONIC SHUTTER	Auto
GAIN CONTROL	Auto
BACK LIGHT COMPENSATION	Auto
WHITE BALANCE	Auto
S/N RATIO	More Than 48 dB
GAMMA	0.45
VIDEO OUTPUT	1 VP-P, 75 ohms
STORAGE/OPERATING TEMPERATURE	-30°C ~ +60°C / -10°C ~ +45°C
DIMENSIONS (Ø×H) mm	Ø98×H:66
WEIGHT	120g

Model NO.	Image Sensor	Picture Elements H*V	TVL	Lens Type	Power Consumption	Sensitivity F:1.2	Chip
LMD-200ARE	1/3" SHARP CCD	NTSC:512(H)×492(V) PAL:500(H)×582(V)	420	3.6 mm	DC12V/80mA	0.5 LUX	NEXT CHIP
LMD-200ASE	1/3" SONY CCD	NTSC:512(H)×492(V) PAL:500(H)×582(V)	420	3.6 mm	DC12V/80mA	0.1 LUX	NEXT CHIP
LMD-200ASR	1/3" SONY CCD	NTSC:512(H)×492(V) PAL:500(H)×582(V)	380	3.6 mm	DC12V/90mA	0.1 LUX	SONY 11R
LMD-200ASH	1/3" SONY Super HAD CCD	NTSC:768(H)×494(V) PAL:752(H)×582(V)	480	3.6 mm	DC12V/90mA	0.5 LUX	NEXT CHIP
LMD-200AXH	1/3" SONY Super HAD CCD	NTSC:768(H)×494(V) PAL:752(H)×582(V)	520	3.6 mm	DC12V/100mA	0.05 LUX	SONY 11X