

LMD-710 SERIES




Features

- Digital signal processor
- Auto trace white balance
- Automatic gain control
- 3.7mm pinhole lens
- Built in 2 pcs of camera board (optional)



Dimensions

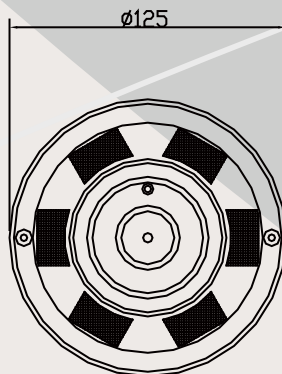

ITEMS	LMD-710 SERIES
SCANNING SYSTEM	2:1 Interlace
ELECTRONIC SHUTTER	Auto
GAIN CONTROL	Auto
BACK LIGHT COMPENSATION	Auto
WHITE BALANCE	Auto
S/N RATIO	More Than 48 dB
GAMMA	0.45
VIDEO OUTPUT	1 VP-P, 75 ohms
STORAGE/OPERATING TEMPERATURE	-30°C ~ +60°C / -10°C ~ +45°C
DIMENSIONS (Ø×H) mm	Ø125×H:52
WEIGHT	180g

Model NO.	Image Sensor	Picture Elements H*V	TVL	Lens Type	Power Consumption	Sensitivity F:1.2	Chip
LMD-710ARE	1/3" SHARP CCD	NTSC:512(H)×492(V) PAL:500(H)×582(V)	420	3.7 mm	DC12V/80mA	0.5 LUX	NEXT CHIP
LMD-710ASE	1/3" SONY CCD	NTSC:512(H)×492(V) PAL:500(H)×582(V)	420	3.7 mm	DC12V/80mA	0.1 LUX	NEXT CHIP
LMD-710ASR	1/3" SONY CCD	NTSC:512(H)×492(V) PAL:500(H)×582(V)	420	3.7 mm	DC12V/90mA	0.1 LUX	SONY 11R
LMD-710ASH	1/3" SONY Super HAD CCD	NTSC:768(H)×494(V) PAL:752(H)×582(V)	480	3.7 mm	DC12V/90mA	0.5 LUX	NEXT CHIP
LMD-710HQ	1/3" SONY Super HAD CCD	NTSC:768(H)×494(V) PAL:752(H)×582(V)	540	3.7 mm	DC12V/120mA	0.1 LUX	SONY HQ1