

LMW-521 SERIES




Features

- Digital signal processor
- Automatic gain control
- Auto backlight compensation
- 21 pcs dual-angle high quality led
- Dual-glass design
- Water proof: IP68
- IR distance: 20M~25M
- Light sensor driver RoHS



Dimensions

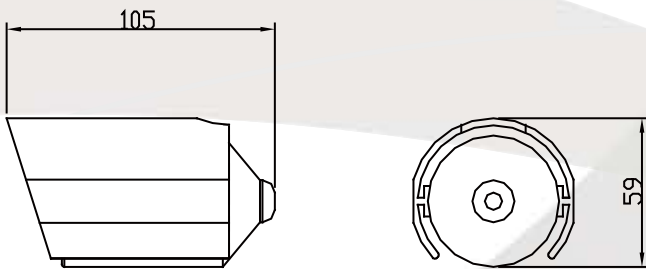

ITEMS	LMW-521 SERIES
SCANNING SYSTEM	2:1 Interlace
ELECTRONIC SHUTTER	Auto
GAIN CONTROL	Auto
BACK LIGHT COMPENSATION	Auto
WHITE BALANCE	Auto
S/N RATIO	More Than 48 dB
GAMMA	0.45
VIDEO OUTPUT	1 VP-P, 75 ohms
LED IR DISTANCE	21 Unit 5φ 850nm infrared LED, 10000hrs (20M)
DAY/NIGHT ON	Auto; >5 Lux Color; <3 Lux B/W
WEATHER PROOF IP RATING	IP 68
POWER SUPPLY	DC 12V
ORAGE/OPERATING TEMPERATURE	-30°C ~ +60°C / -10°C ~ +45°C
DIMENSIONS (Ø×H) mm	Ø55×H:65
WEIGHT	320g

Model NO.	Image Sensor	Picture Elements H*V	TVL	Lens Type (mm)	Power Consumption	Sensitivity F:1.2	Chip
LMW-521R/IR	1/3" SHARP CCD	NTSC:512(H)×492(V) PAL:500(H)×582(V)	420	4/6/8	DC12V/80mA IR ON 250mA	0.5 LUX	NEXT CHIP
LMW-521S/IR	1/3" SONY CCD	NTSC:512(H)×492(V) PAL:500(H)×582(V)	420	4/6/8	DC12V/80mA IR ON 250mA	0.1 LUX	NEXT CHIP
LMW-521SH/IR	1/3" SONY Super HAD CCD	NTSC:768(H)×494(V) PAL:752(H)×582(V)	480	4/6/8	DC12V/90mA IR ON 260mA	0.5 LUX	NEXT CHIP
LMW-521HQ/IR	1/3" SONY Super HAD CCD	NTSC:768(H)×494(V) PAL:752(H)×582(V)	540	4/6/8	IR ON 420mA	0.1 LUX	SONY HQ1