

LMW-742 SERIES





Features

- Light weight, low shopping cost
- Auto white balance
- Dual-glass design
- Water proof: IP 68
- Auto backlight compensation
- IR distance: 30M~35M
- Highlight LED
- 42 pcs dual-angle high quality led
- Light sensor driver RoHS



Dimensions

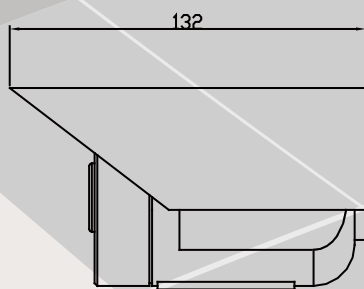

| ITEMS | LMW-742 SERIES |
|-------------------------------|---|
| SCANNING SYSTEM | 2:1 Interlace |
| ELECTRONIC SHUTTER | Auto |
| GAIN CONTROL | Auto |
| BACK LIGHT COMPENSATION | Auto |
| WHITE BALANCE | Auto |
| S/N RATIO | More Than 48 dB |
| GAMMA | 0.45 |
| VIDEO OUTPUT | 1 VP-P, 75 ohms |
| LED IR DISTANCE | 42 Unit 5φ 850nm infrared LED, 10000hrs (35M) |
| DAY/NIGHT ON | Auto; >5 Lux Color; <3 Lux B/W |
| WEATHER PROOF IP RATING | IP 68 |
| POWER SUPPLY | DC 12V |
| STORAGE/OPERATING TEMPERATURE | -30°C ~ +60°C / -10°C ~ +45°C |
| DIMENSIONS (Ø×H) mm | Ø80×H:132 |
| WEIGHT | 235g |

| Model NO. | Image Sensor | Picture Elements H*V | TVL | Lens Type (mm) | Power Consumption | Sensitivity F:1.2 | Chip |
|-------------|----------------|---|-----|----------------|---------------------------|-------------------|-----------|
| LMW-742R/IR | 1/3" SHARP CCD | NTSC:512(H)×492(V) PAL:500(H)×582(V) | 420 | 4/6/8 | DC12V/80mA IR ON 250mA | 0.5 LUX | NEXT CHIP |
| LMW-742S/IR | 1/3" SONY CCD | NTSC:512(H)×492(V) PAL:500(H)×582(V) | 420 | 4/6/8 | DC12V/80mA IR ON 250mA | 0.1 LUX | NEXT CHIP |