

## LMW-872 SERIES





## Features

- Digital signal processor
- Auto trace white balance
- Automatic gain control
- Dual-glass design
- Water proof: IP68
- IR distance:40M~50M
- High-quality, dual-angle LED
- Dual-glasses design
- Light sensor driv RoHS



## Dimensions

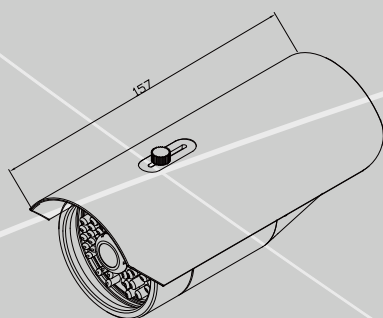

ITEMS	LMW-872 SERIES
SCANNING SYSTEM	2:1 Interlace
ELECTRONIC SHUTTER	Auto
GAIN CONTROL	Auto
BACK LIGHT COMPENSATION	Auto
WHITE BALANCE	Auto
S/N RATIO	More Than 48 dB
GAMMA	0.45
VIDEO OUTPUT	1 VP-P, 75 ohms
LED IR DISTANCE	70 Unit 5φ 850n Minfrared LED, 10000hrs (45M)
DAY/NIGHT ON	Auto; >5 Lux Color;<3 Lux B/W
WEATHER PROOF IP RATING	IP 68
POWER SUPPLY	DC 12V / AC 90 V~AC 260 V (Optional)
STORAGE/OPERATING TEMPERATURE	-30°C ~ +60°C / -10°C ~ +45°C
DIMENSIONS (Ø×H) mm	Ø90×H:157
WEIGHT	360g

Model NO.	Image Sensor	Picture Elements H*V	TVL	Lens Type (mm)	Power Consumption	Sensitivity F:1.2	Chip
LMW-872R/IR	1/3" SHARP CCD	NTSC:512(H)×492(V) PAL:500(H)×582(V)	420	4/6/8/12/16	DC12V/80mA IR ON 400mA	0.5 LUX	NEXT CHIP
LMW-872S/IR	1/3" SONY CCD	NTSC:512(H)×492(V) PAL:500(H)×582(V)	420	4/6/8/12/16	DC12V/80mA IR ON 400mA	0.1 LUX	NEXT CHIP
LMW-872SR/IR	1/3" SONY CCD	NTSC:512(H)×492(V) PAL:500(H)×582(V)	420	4/6/8/12/16	DC12V/80mA IR ON 400mA	0.1 LUX	SONY 11R
LMW-872SH/IR	1/3" SONY Super HAD CCD	NTSC:768(H)×494(V) PAL:752(H)×582(V)	480	4/6/8/12/16	DC12V/80mA IR ON 410mA	0.5 LUX	NEXT CHIP
LMW-872AXH/IR	1/3" SONY Super HAD CCD	NTSC:768(H)×494(V) PAL:752(H)×582(V)	520	4/6/8/12/16	DC12V/100mA IR ON 420mA	0.05 LUX	SONY 11X
LMW-872HQ/IR	1/3" SONY Super HAD CCD	NTSC:768(H)×494(V) PAL:752(H)×582(V)	540	4/6/8/12/16	DC12V/100mA IR ON 420mA	0.1 LUX	SONY HQ1