


## LMN1032S SERIES



## Dimensions

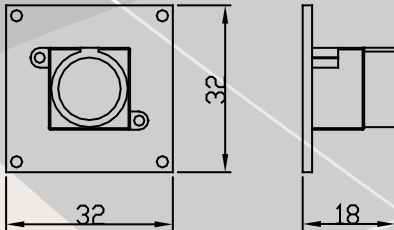

## Features


- Electronic shutter up to 1/100,000 sec
- Night vision (optional)
- Low power consumption

ITEMS	LMN1032S SERIES	
	PAL	NTSC
SYSTEM	PAL	NTSC
IMAGE SENSOR	1/3"SONY CCD	
DSP	NEXTCHIP 2010	
PICTURE ELEMENTS(H)X(V)	500×582, 752×582(HI)	510×492, 768×494(HI)
SYNC SYSTEM	Internal	
MINIMUM ILLUMINATION (LUX)	0.1 LUX 0.5 LUX(HI)	
HORIZONTAL RESOLUTION (TVL)	420 TVL 480 TVL(HI)	
S/N RATIO	More Than 52 dB	
ELECTRONIC SHUTTER	Auto; Range 1/50(1/60) Up to 1/100,000 sec	
WHITE BALANCE	Auto	
BLC	Auto	
AGC	Auto	
LENS	Board Lens (3.0mm, 3.6mm , 6mm , 8mm, and 3.7mm Pin Hole)Option	
OPERATING TEMPERATURE	-10℃ ~ +45℃	
POWER SUPPLY/CONSUMPTION	DC12V±1V/80mA	
DIMENSIONS	32(W)×32(H)mm	

## LMN1032P SERIES



## Dimensions

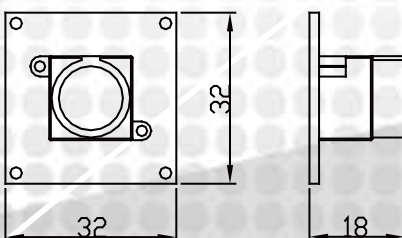

## Features

- Electronic shutter up to 1/100,000 sec
- Night vision (optional)
- Low power consumption

ITEMS	LMN1032P SERIES	
	PAL	NTSC
SYSTEM	PAL	NTSC
IMAGE SENSOR	1/3"SHARP CCD	
DSP	NEXT CHIP 2010	
PICTURE ELEMENTS(H)X(V)	500×582	
SYNC SYSTEM	Internal	
MINIMUM ILLUMINATION (LUX)	0.1 LUX	
HORIZONTAL RESOLUTION (TVL)	420 TVL	
S/N RATIO	More Than 50 dB	
ELECTRONIC SHUTTER	Auto; Range 1/50(1/60) Up to 1/100,000 sec	
WHITE BALANCE	Auto	
BLC	Auto	
AGC	Auto	
LENS	Board Lens (3.0mm, 3.6mm , 6mm , 8mm, and 3.7mm Pin Hole)Optional	
OPERATING TEMPERATURE	-10℃ ~ +45℃	
POWER SUPPLY/CONSUMPTION	DC12V±1V/80mA	
DIMENSIONS	32(W) ×32(H)mm	