


LM81X SERIES



Features

- Electronic shutter up to 1/100,000 sec
- Night vision (optional)
- Low power consumption
- CS mount / varifocal auto iris lens available

Dimensions

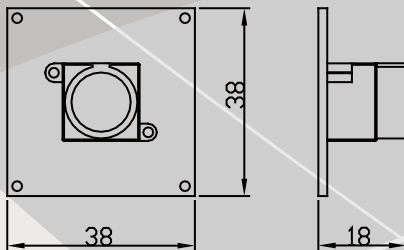

ITEMS	LM81X SERIES	
	PAL	NTSC
SYSTEM	PAL	NTSC
IMAGE SENSOR	1/3"SONY CCD	
DSP	SONY 11X	
PICTURE ELEMENTS(H)X(V)	500×582, 752×582(HI)	510×492, 768×494(HI)
SYNC SYSTEM	Internal	
MINIMUM ILLUMINATION (LUX)	0.05 LUX 0.06 LUX(HI)	
HORIZONTAL RESOLUTION (TVL)	450 TVL 520 TVL(HI)	
S/N RATIO	More Than 52 dB	
ELECTRONIC SHUTTER	Auto; Range 1/50(1/60) Up to 1/100,000 sec	
WHITE BALANCE	Auto	
BLC	Auto	
AGC	Auto	
LENS	Varifocal Auto Iris 4~9mm or 3.7~12mm lens. Board Lens (3.0mm, 3.7mm , 6mm , 8mm, and 12mm Pin Hole)Optional	
OPERATING TEMPERATURE	-10°C ~+45°C	
POWER SUPPLY	DC12V±1V	
DIMENSIONS	38(W)×38(H)mm	


LM81X/4~9 SERIES



Features

- Electronic shutter up to 1/100,000 sec
- Night vision (optional)
- Low power consumption
- CS mount / varifocal auto iris lens available

Dimensions

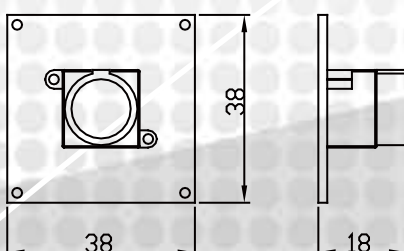

ITEMS	LM81X/4~9 SERIES	
	PAL	NTSC
SYSTEM	PAL	NTSC
IMAGE SENSOR	1/3"SONY CCD	
DSP	SONY 11X	
PICTURE ELEMENTS(H)X(V)	500×582, 752×582(HI)	510×492, 768×494(HI)
SYNC SYSTEM	Internal	
MINIMUM ILLUMINATION (LUX)	0.05 LUX 0.06 LUX(HI)	
HORIZONTAL RESOLUTION (TVL)	450 TVL 520 TVL(HI)	
S/N RATIO	More Than 52 dB	
ELECTRONIC SHUTTER	Auto; Range 1/50(1/60) Up to 1/100,000 sec	
WHITE BALANCE	Auto	
BLC	Auto	
AGC	Auto	
LENS	Varifocal Auto Iris 4~9mm or 3.7~12mm lens. Board Lens (3.0mm, 3.7mm , 6mm , 8mm, and 12mm Pin Hole)Optional	
OPERATING TEMPERATURE	-10°C ~+45°C	
POWER SUPPLY	DC12V±1V	
DIMENSIONS	38(W)×38(H)mm	