

LDR-04HB/DVD




LDR-08/16HB/DVD



Features

- H.264 high resolution data compression
720×480/720×576 D1 Recording
- Support 16 CH audio input 16 CH alarm input
- Hybrid DVR, it can link to 2 CH IP camera as a local-end video recording
- DVD/USB backup

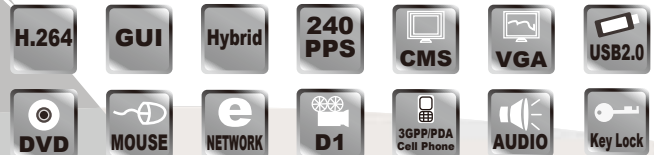

Model No.		LDR-04HB/DVD	LDR-08HB/DVD	LDR-16HB/DVD
VIDEO SIGNAL	Television System	NTSC/PAL		
	Video Resolution	720×480(NTSC)/ 720×576(PAL)		
	Video Inputs	4 CH Cameras	8 CH Cameras	16 CH Cameras
	Video Input Signal	1.0 Vp-p 75Ohms		
	Video Outputs	Main monitor, Call monitor, VGA		
	Video Output Signal	1.0 Vp-p 75Ohms		
VIDEO FEATURES	Live(display FPS)	120(NTSC)/100(PAL)	240(NTSC)/200(PAL)	480(NTSC)/400(PAL)
	Zoom	2 times digital		
	Sequence	Sequence Display In Full Size		
	Display Format	Full screen, Quad spilt, 4 spilt	Full screen, Quad spilt, 9 spilt	Full screen, Quad spilt, 9 spilt, 16 spilt
	Video Enhance	Brightness, Contrast control each camera		
	VGA Enhance	Brightness, Contrast, saturation		
AUDIO	G.723	4ch Input/2ch Output	8ch Input/2ch Output	16ch Input/2ch Output
	Recording Speed(IPS)	120(NTSC)/100(PAL)	240(NTSC)/200(PAL)	240(NTSC)/200(PAL)
RECORD	Recording Resolution	720×480, 720×240, 360×240(NTSC)/ 720×576, 720×288, 360×288(PAL)		
	Codec	H.264		
	Recording Material	2 SATA HDD		
	Recording	Timer, Motion, Alarm, Manual Individually Setting		
SEARCH	Timer, Motion	Fast ×64, Slow, Forward, Rewind, Image by image		
BACKUP	DVD R/W, USB2.0	Each Camera, ALL Camera, Time range		
USER INTERFACE	Operating Interface	Mouse, Touch panel, IR Remote Control, Network		
NETWORK	Ethernet 10/100M Auto	PPPoE, TCP/IP, DHCP, DDNS Server		
ALARM	Alarm Inputs	4 Inputs	8 Inputs	16 Inputs
	Alarm latch up	1~10 sec		
	Buzzer Out	On/Off		
POWER	Input Voltage	DC 12V		
	Power consumption	Approx. 80W		
MECHANICAL	Dimension(m/m)	335(W)×50(D)×302(H) mm	362(W)×350(D)×90(H) mm	
	Weight(Kg)	Approx.3.5Kg	Approx. 5.5 Kg	
ENVIRONMENT	Operating Temperature	0~60degC		
	Humidity	10~90%		