




# LED藝術燈籠系列 » LED Lantern



## 產品照片 Product Photo:



## 規格 Specification:

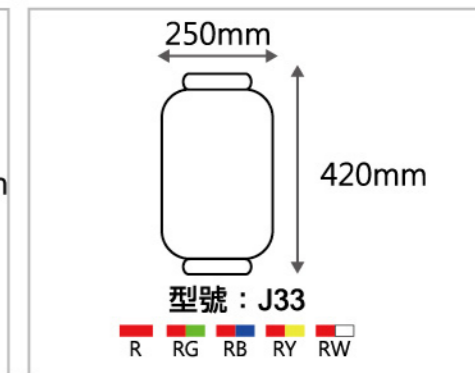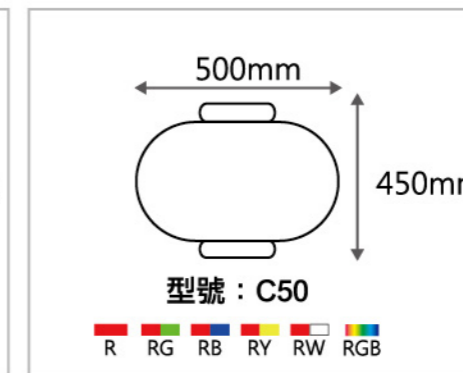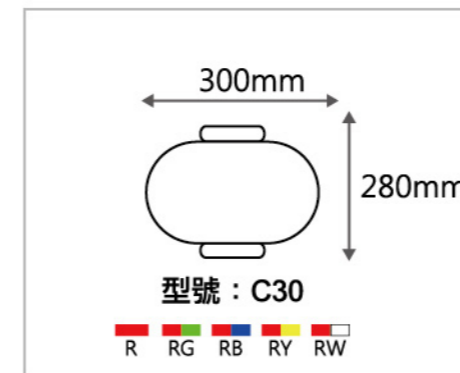

## 產品特點 Features:

LED藝術燈籠系列產品，可以給燈光藝術設計提供廣大的想像空間。透過無線的方式接收發佈控制信號，控制亮度、色彩、文字和圖案的內容。隨意編輯顯示文字、圖案，亦可隨時變換字體的顏色及不同的變換方式。具有防水、防潮、防塵等功能，易於安裝且維護簡單，LED藝術燈籠可以360度立體展示，色彩絢麗顛覆傳統。

Our product of LED art decorative lamp is a lighting artwork with modern science and technology. It gives the majority of the imagination, also programmable with any text and graphics.

The cabinet is adopted to achieve IP63, which has water proof, moisture proof, corrosion proof function, easy install, low maintenance, and 360° stereoscopic display lanterns.

programmable with any text and graphics.  
可更換圖片文字方面更換資訊

mono color, dual color, and full color.  
有單色、雙色、全彩

LED燈環保又節能  
energy saving and environmental protection.

Water proof :IP63  
防水等級: IP63

造型完全客製化  
customized.

## 產品應用 Application:

適合文化產業及商業空間，可隨時變化文字資訊和動態圖像，用於廟宇、街燈、餐廳、飯店等更添氣氛亦具廣告效益。  
Suitable for culture industry、commercial use、temples、street light、restaurant and Hotels.



可編輯顯示各式動態動畫  
Program the lanterns with a computer.



能完整秀出圖樣及商標  
Display pattern and trademarks.



支援多國文字輸入  
Support multi-input.

	C30 中華燈籠	C50 中華燈籠	J33 宮廷燈籠
產品型號 Type	C30	C50	J33
顯示高度 Displayed Height	190mm	380mm	330mm
顯示直徑 Displayed Diameter	300mm	500mm	240mm
象素間距 Pixel Distance	10mm	18mm	15mm
象素規格 Pixel Standard	R/RY/RB/RG/RW	RGB/R/RY/RG/RW	R/RY/RB/RG/RW
LED規格 LED Standard	方形圓頭(Square, Round Head)	方形圓頭(Square, Round Head)	方形圓頭(Square, Round Head)
緯度象素 Longitude Pixel	20點	24點	24點
經度象素 Latitude Pixel	80點	80點	64點
總象素 Total Pixel	1600點	1920點	1536點
工作方式 Working Style	恒流、1/10掃描 (constant current, 1/10 scanning)	恒流、1/12掃描 (constant current, 1/12 scanning)	恒流、1/12掃描 (constant current, 1/12 scanning)
燈籠亮度 Brightness	900cd/m <sup>2</sup>	3000cd/m <sup>2</sup>	900cd/m <sup>2</sup>
工作電壓 Work Voltage	DC5V	DC5V	DC5V
使用電壓 Service voltage	AC110/220V±5%	AC110/220V±5%	AC110/220V±5%
最佳距離 Optimum Distance	5~100m	10~100m	5~100m
最佳角度 Optimum Angle	90°	90°	90°
最大功率 Highest Power	50W	100W	50W
平均功率 Average Power	20W	50W	25W
控制方式 Control Style	GSM/RS232/RF	GSM/RS232/RF	GSM/RS232/RF
工作溫度 Working temperature	-10°C~60°C	-10°C~60°C	-10°C~60°C
燈籠尺寸 Size	280Hx300W	450Hx500W	420Hx250W
燈籠重量 Weigh	1.57KG	9.7KG	1.85KG

R為單紅色，RY為紅黃雙色，RG為紅綠雙色，RB為紅藍雙色，RW為紅白雙色  
R=Red、RY=R=Red and Yellow、RG=Red and Green、RB=Red and Blue、RW=Red and White